


# Mix and Match Valances

9235

Many more styles may be achieved than are shown on the cover. Use a pocket for the rod of your choice, or use a decorative shirr tape and install it, with hook and loop tape, to a 2 1/2" or a 4 1/2" flat rod.

Alteration instructions included. As is, the valances finish 12 1/2" at the shortest, 16" in the middle of the scallop and the tapered valance is 27" at each end. Headers extend an additional 2" to 6" above the rod. These patterns can also be mixed and matched with *Pattern #9236*. **Fabric Suggestions:** About the only fabrics not recommended are extremely heavy and limp ones. The headers are the main feature of these valances and require body and crispness to make them do their job. If your fabric is soft, add an interfacing to the headers. **Lining:** These valances should be completely lined with the self fabric or a contrast lining.

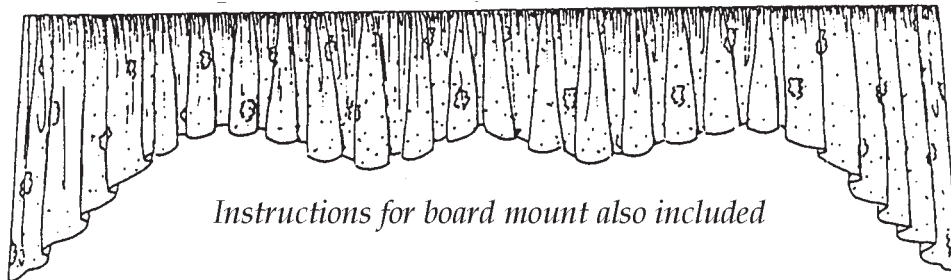

*Instructions for board mount also included*

## YARDAGE

The size of the pattern pieces are based on a 54" wide fabric. If your fabric is narrower, purchase extra. Widths of fabrics are sewn together before shape of valance is cut.


Window sizes	Widths of Fabric Needed	Window sizes	Widths of Fabric Needed
15" - 30" .....	1	106" - 124" .....	6
30" - 45" .....	2	124" - 148" .....	7
45" - 64" .....	3	148" - 160" .....	8
64" - 85" .....	4	160" - 190" .....	9
85" - 106" .....	5	190" - 212" .....	10

Window sizes to the left of the chart will have 3 to 3 1/2 times fullness. Window sizes to the right of the chart will have 2 to 2 1/2 times fullness.

## VALANCE PATTERNS

All patterns are 53" wide and represent one width of fabric.

**Tapered Section:** (28" Cut Length) One width creates one taper and one half arch. Two widths will create a full arch; or mix other sections in the middle.



**Curved Section:** (17" Cut Length) One complete scallop per width of fabric.



**Straight Section:** (13" Cut Length) Use alone or mix into the other sections. Using it between the tapered sections creates a simple valance with tapered sides.



**Warning:** In order to eliminate a seam in the middle of the valance for windows needing even number of widths (4, 6, 8, etc.) one of the shorter cut lengths may need to be as deep as the deepest cut length.

## HEADER PATTERNS

Select the header patterns of your choice and tape them to the valance patterns before cutting fabrics


**The notched header:** add 6 1/2" to above cut length.



**The arched header:** add 6 1/2" to above cut length.



**The 6" straight header:** add 6 1/2" to above cut length.



**The 2" straight header:** add 2 1/2" to above cut length.



**Pouff Header:** Add 13" to the above cut lengths. 3/4" curtain rod will be required.

**Decorative Shirr Tape** (if desired): 1 1/2 yards per width of fabric. Example: Conso® four cord zigzag pleat, 4" wide # 35529.

**Corded header:** 1 1/2 yards of 1/2" diameter cord for every width of fabric used.

**Trim (per width of fabric):** each tapered section.....56"      each curve section.....54"      each straight section.....53"