


## TIP OF THE MONTH JANUARY 2005

### JABOTS FOR SHAPED BOARDS

After the jabot is completely made and the pleats are in, lay the template on top of the jabot. Make sure everything is vertically straight as to how it will hang on the window.

#### Jabots that will attach inside the board:


Mark the jabot return to be straight out at the end projection.

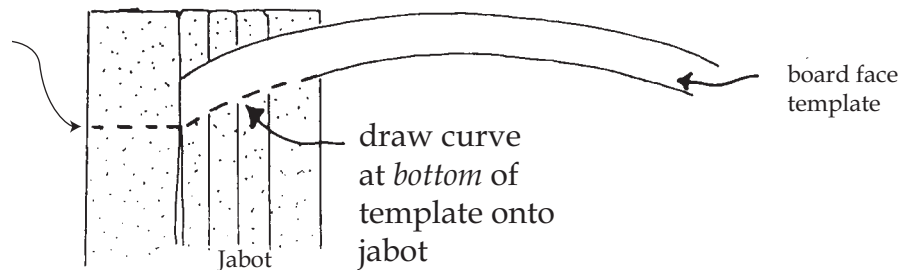

Remove the template, machine stitch on the drawn line to secure. Trim the jabot, leaving about 1" allowance above the stitching. Staple this jabot inside the board, keeping the stitching line even at the bottom curve of the board.

#### Jabots that will attach outside the board:

Mark the jabot return to be straight out at the end projection.

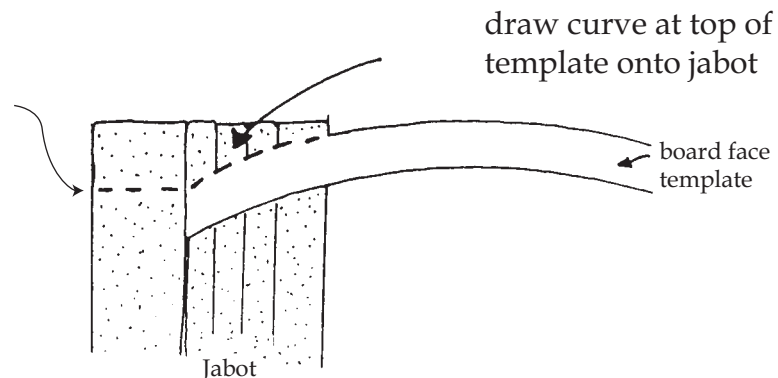

Remove the template, machine stitch on the drawn line to secure. Trim the jabot leaving about 1 1/2" allowance above the stitching. When attaching this jabot to the outside of the board, keep the stitching line even at the top of the board, and let the top fabric allowance wrap over the edge and down inside the board, staple.